


TruTorq C-Type 180 Degree Dimensions

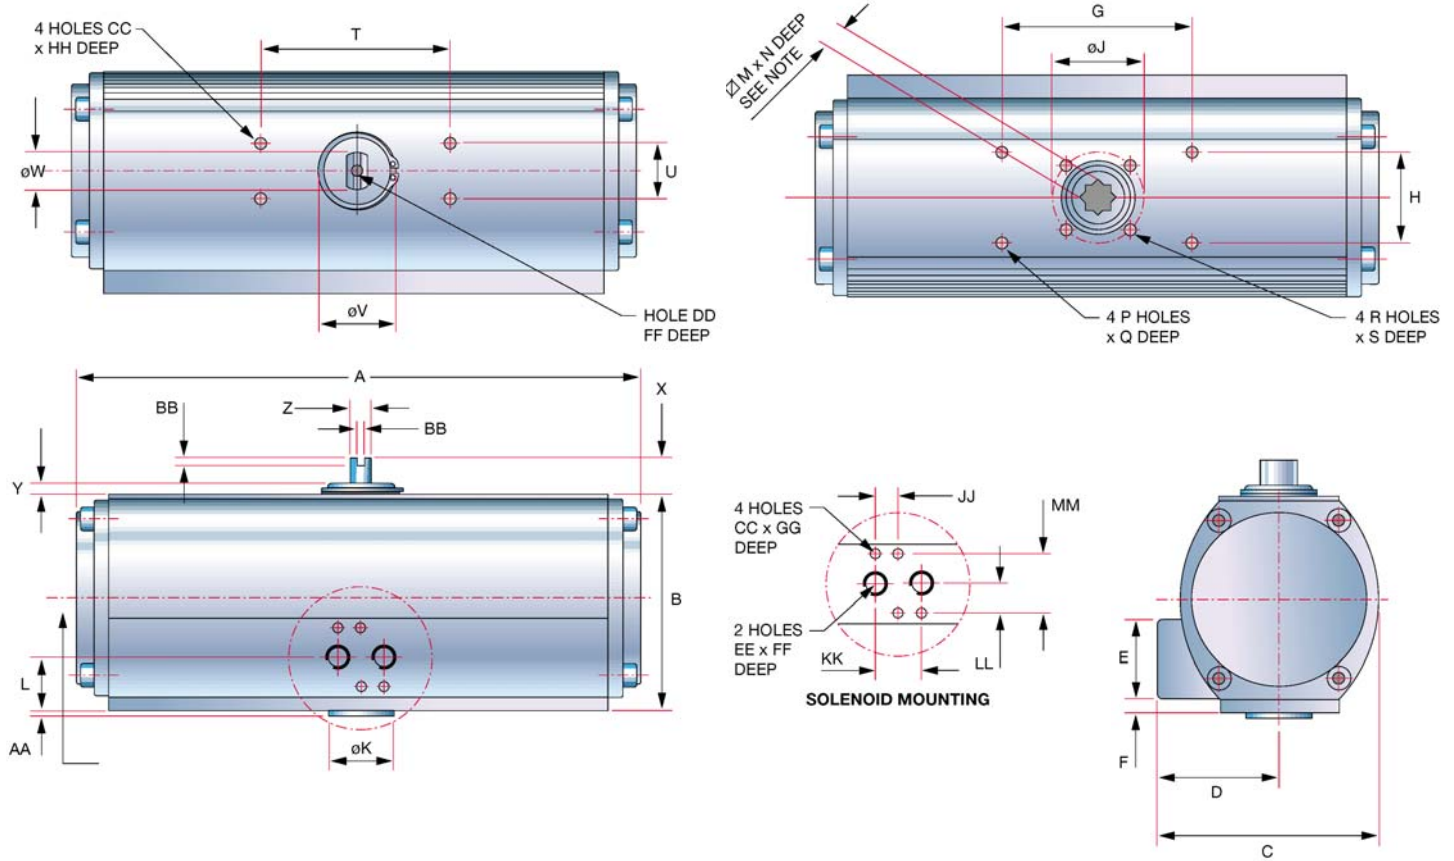

METRIC DIMENSIONS

Size	A	B	C	D	E	F	G	H	J	K	L	M	Nmin	P	Q	R	S	T
TT 2 F03	169.0	73.0	75.5	43.5	41.0	---	73.0	32.0	36.0	25.0	20.5	9.0	10.0	M5	8.0	M5	8.0	80.0
TT 4 F04	215.0	90.5	87.5	47.5	41.0	---	73.0	32.0	42.0	30.0	20.5	11.0	12.0	M5	8.0	M5	8.0	80.0
TT 8 F05	245.0	109.0	105.0	57.0	42.0	7.5	73.0	32.0	50.0	35.0	28.5	14.0	16.0	M6	10.0	M6	10.0	80.0
TT 12 F05	295.0	118.5	121.0	67.0	43.0	8.0	107.0	49.0	50.0	35.0	29.5	14.0	16.0	M6	10.0	M6	10.0	80.0
TT 20 F07	337.0	140.5	136.5	72.0	43.0	8.0	107.0	49.0	70.0	55.0	29.5	17.0	19.0	M6	10.0	M8	13.0	80.0
TT 35 F10	402.0	166.5	156.0	78.0	43.0	8.5	161.0	73.0	102.0	70.0	30.0	22.0	24.0	M6	12.0	M10	16.0	80.0

METRIC DIMENSIONS

Size	U	V	W	X	Y	Z	AA _{max}	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM
TT 2 F03	30.0	25.0	16.0	20.0	4.5	11.5	2.0	4.0	M5	M6	G1/8"	12.0	8.0	5.0	12.0	24.0	16.0	32.0
TT 4 F04	30.0	31.0	20.0	20.0	4.5	11.5	2.0	4.0	M5	M6	G1/8"	12.0	8.0	5.0	12.0	24.0	16.0	32.0
TT 8 F05	30.0	35.0	20.0	20.0	5.0	11.5	3.0	4.0	M5	M6	G1/8"	12.0	8.0	5.0	12.0	24.0	16.0	32.0
TT 12 F05	30.0	45.0	20.0	20.0	5.5	11.5	3.0	4.0	M5	M6	G1/4"	12.0	8.0	5.0	12.0	24.0	16.0	32.0
TT 20 F07	30.0	50.0	32.0	20.0	6.5	19.0	3.0	4.0	M5	M6	G1/4"	12.0	8.0	5.0	12.0	24.0	16.0	32.0
TT 35 F10	30.0	61.0	32.0	20.0	7.0	19.0	3.0	4.0	M5	M6	G1/4"	12.0	8.0	5.0	12.0	24.0	16.0	32.0

IMPERIAL DIMENSIONS

Size	A	B	C	D	E	F	G	H	J	K	L	M	Nmin	P(unc)	Q	R(unc)	S	T
TT 2 F03	6.65	2.87	2.97	1.71	1.61	---	2.87	1.26	1.42	0.984	0.81	0.354	0.39	10-24	0.31	10-24	0.31	3.15
TT 4 F04	8.46	3.56	3.44	1.87	1.61	---	2.87	1.26	1.65	1.181	0.81	0.433	0.47	10-24	0.31	10-24	0.31	3.15
TT 8 F05	9.65	4.29	4.13	2.24	1.65	0.30	2.87	1.26	1.97	1.378	1.12	0.551	0.63	1/4-20	0.39	1/4-20	0.39	3.15
TT 12 F05	11.61	4.67	4.76	2.64	1.69	0.31	4.21	1.93	1.97	1.378	1.16	0.551	0.63	1/4-20	0.39	1/4-20	0.39	3.15
TT 20 F07	13.27	5.53	5.37	2.83	1.69	0.31	4.21	1.93	2.76	2.165	1.16	0.669	0.75	5/16-18	0.39	5/16-18	0.51	3.15
TT 35 F10	15.83	6.56	6.14	3.07	1.69	0.33	6.34	2.87	4.02	2.756	1.18	0.866	0.94	5/16-18	0.47	3/8-16	0.63	3.15

IMPERIAL DIMENSIONS

Size	U	V	W	X	Y	Z	AA _{max}	BB	CC(unf)	DD	EE	FF	GG	HH	JJ	KK	LL	MM
TT 2 F03	1.18	0.98	0.63	0.79	0.18	0.45	0.08	0.16	10-32	M6	NPT1/8	0.50	0.31	0.20	0.47	0.94	0.63	1.26
TT 4 F04	1.18	1.22	0.79	0.79	0.18	0.45	0.08	0.16	10-32	M6	NPT1/8	0.50	0.31	0.20	0.47	0.94	0.63	1.26
TT 8 F05	1.18	1.38	0.79	0.79	0.20	0.45	0.16	0.16	10-32	M6	NPT1/8	0.50	0.31	0.20	0.47	0.94	0.63	1.26
TT 12 F05	1.18	1.81	0.79	0.79	0.22	0.45	0.16	0.16	10-32	M6	NPT1/4	0.50	0.31	0.20	0.47	0.94	0.63	1.26
TT 20 F07	1.18	1.97	1.26	0.79	0.26	0.75	0.16	0.16	10-32	M6	NPT1/4	0.50	0.31	0.20	0.47	0.94	0.63	1.26
TT 35 F10	1.18	2.40	1.26	0.79	0.28	0.75	0.16	0.16	10-32	M6	NPT1/4	0.50	0.31	0.20	0.47	0.94	0.63	1.26



TruTorq Actuators



180 dim

10/03 R0

ALL RIGHTS RESERVED